

1 SENSOR INPUT

3 HOUSING OPTIONS

Every T24 transmitter module can be ordered in **one of three** IP rated enclosures.

To aid your work, they provide:

- Power Supply
- Water & Dust Protection
- Field Connectivity
- Ready-Made Mounting Solution

ACM






ACMi



ACMm



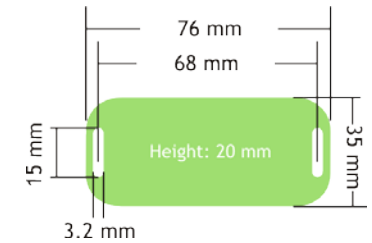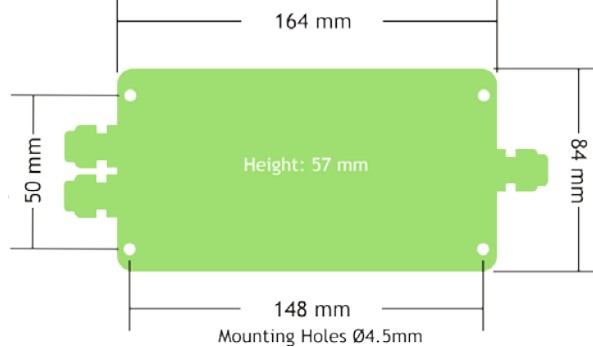

Enclosure	ACM		ACMi		ACMm		
Wireless range / m	800 m (2,600 ft)				500 m (1,600 ft)		
Power supply	5-18 Vdc or 2xD cell		3 Vdc (2xAA)		3 Vdc (2xAAA with BB1)		
Battery life at 1 transmission per second	1 year		5 months		2 months		
Antenna	ANTA		ANTA		PCB Printed		
Radio frequency	2.4 GHz						
Operating temperature /°C	-20 to +55		-20 to +55		-20 to +55		
Environmental protection	IP67				IP50		
Module size / mm	164 x 84 x 57		80 x 62 x 34		76 x 35 x 20		
Software & configuration	T24 Toolkit & T24LOG100						
Input modules (determined by order code)	 SA Strain  SA f Strain(2kHz)  IA Current  VA Voltage  TA Temperature  PA Pulse  RA Potentiometer						
Order codes:	T24-ACM-SA T24-ACMi-SA T24-ACMm-SA T24-ACM-SAf T24-ACMi-SAf T24-ACMm-SAf T24-ACM-IA T24-ACMi-IA T24-ACMm-IA T24-ACM-VA T24-ACMi-VA T24-ACMm-VA T24-ACM-TA T24-ACMi-TA T24-ACMm-TA T24-ACM-SA T24-ACMi-SA T24-ACMm-SA T24-ACM-RA T24-ACMi-RA T24-ACMm-RA						