




## WL-STLC Wireless Crosby™ Bow Load Shackle

### Special Options

Special ranges	The TELSHACK-B can be supplied in any range, between 12te and 400te and calibrated as required. Usually we will choose the nearest standard shackle size. We can also offer special design shackles up to 2000te. Please contact our sales team for more details.
Centralising bobbin	We can offer an optional centralising bobbin. This helps improve the overall load cell accuracy in certain cable tension applications. The bobbin is shown pictorially in the drawing below.
Multi-shackle systems	It is possible with the standard handheld telemetry display to use up to 12 shackles with a single handheld. Each shackle is paired with the handheld and can be used to view individual load cells or summated load cells. These values can be sent to a printer or a PC.



### Dimensions

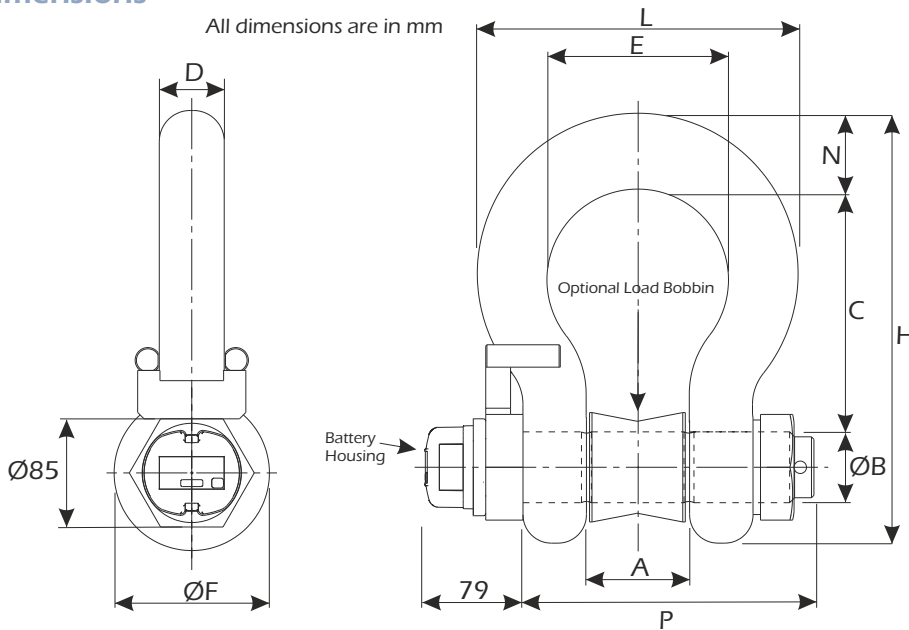

Rating (tonnes)	A	ØB	C	D	E	ØF	H	L	N	P	Weight (kgs)	Resolution (tonnes)
12	51.5	35.1	119	31.8	82.5	76	210	146	35.1	171	8	0.01
17	60.5	41.4	146	38.1	98.5	92	254	175	41.1	201	12	0.02
25	73	51	178	44.5	127	106	313	225	57	236	18	0.02
40	73.2	50.8	178	46.7	127	106	313	224	57.2	236	18	0.05
55	82.6	57.2	197	52.8	146	122	347	258	61	269	25	0.05
85	105	69.9	267	68.8	184	148	455	324	79.2	351	45	0.1
120	127	82.6	330	79.2	200	165	546	371	92.2	387	85	0.1
150	133	95.3	372	95.3	229	203	632	432	105	448	125	0.1
200	184	121	386	116	279	267	706	529	127	587	205	0.2
300	213	152	475	124	330	330	871	629	154	646	359	0.2
400	225	175	680	165	325	350	1078	655	165	700	560	0.5

www.800loadcel.com

Issue No. 3

Issue date: 10/11/2016

APPROVED

(unapproved if printed)

